


SOPPORTI MONOBLOCCO PER TENSIONAMENTO


Serie STL

per cuscinetti orientabili a rulli con bussola conica

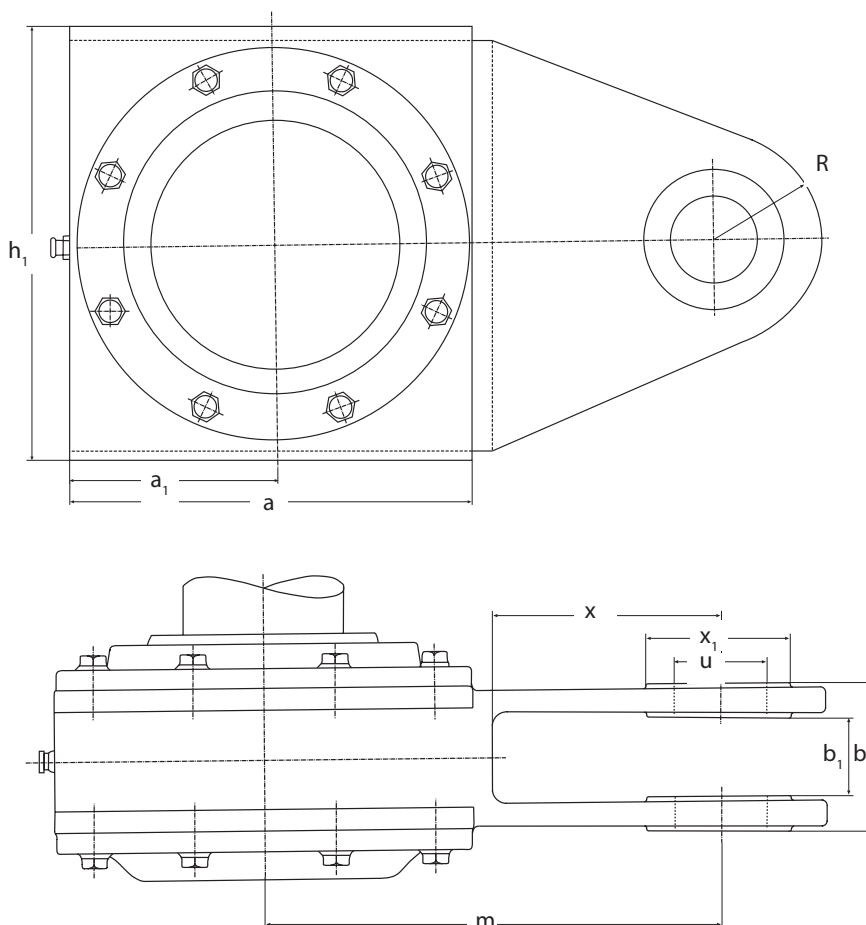


Sigla sopporto	d ₁	a	a ₁	h ₁	f	m	x	x ₁	u	b	b ₁	g ₂	g ₄	g ₃	g ₅	g	f ₁
[mm]																	
STL 2211 K	50	150	75	150	135	105	30	60	20	42	22	109	35	49	60	50	34
STL 2212 K	55	165	82,5	165	150	120	37	60	25	50	26	120	40	54	66	60	43
STL 2213 K	60	160	80	180	155	145	65	60	30	66	30	135	53	62	73	78	53
STL 2216 K	70	180	90	200	175	155	65	60	30	66	30	145	58	67	78	78	53
STL 2218 K	80	210	105	230	200	170	65	60	30	66	30	168	63	78	90	78	53
STL 2220 K	90	235	117,5	250	220	185	67,5	65	35	70	36	170	65	80	90	69	40
STL 2222 K	100	255	125	270	240	200	70	70	40	76	40	199	68	94	105	78	53
STL 2224 K	110	275	135	290	260	210	70	70	40	76	40	180	69	85	95	78	53
STL 2226 K	115	295	147,5	310	290	220	70	70	40	76	40	194	78	87	110	82	53
STL 2228 K	125	315	155	330	300	230	70	70	40	76	40	206	78	93	113	88	53
STL 3028 K	125	260	130	300	270	225	90	90	50	150	60	156	68	68	88	70	45
STL 3030 K	135	280	140	320	290	235	90	90	50	150	60	194	82	82	112	85	45
STL 3132 K	140	370	185	370	340	350	160	100	61	132	62	229	108	108	121	116	65
STL 3034 K	150	325	162,5	360	330	260	90	90	50	150	60	201	88	88	113	102	65
STL 3134 K	150	375	187,5	400	370	395	180	100	60	132	62	249	113	113	136	120	65
STL 2236 K	160	420	210	440	410	380	170	140	80	135	65	255	95	120	135	114	60
STL 3036 K	160	350	175	390	360	275	90	90	50	150	60	201	88	88	113	100	65
STL 3136 K	160	400	200	440	410	360	158	140	80	135	65	248	105	113	135	120	60
STL 3236 K	160	420	210	450	410	300	90	140	80	140	70	285	110	135	150	140	93

Esecuzione AF

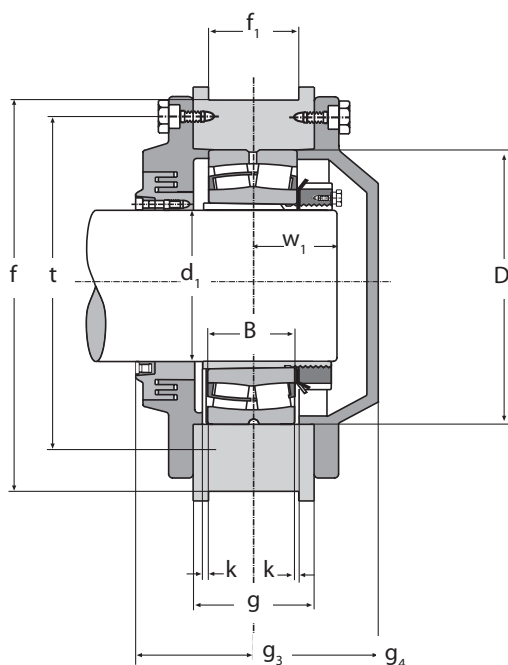

Esecuzione BF

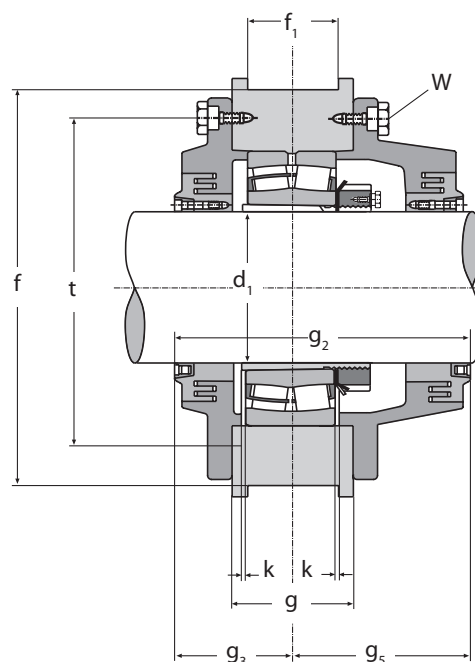

Esecuzione AL


Esecuzione BL

D [mm]	B	t	k	W ₁	R	Cuscinetti con bussola adatti	Viti di fissaggio del coperchio	Massa [kg]
100	25	122	2	27	30	22211 K H 311	12 x M8	10
110	28	135	2	30	35	22212 K H 312	12 x M8	11
120	31	135	2	35	40	22213 K H 313	16 x M8	12
140	33	155	2	40	40	22216 K H 316	16 x M8	20
160	40	180	2	45	40	22218 K H 318	16 x M8	30
180	46	205	2,5	46	40	22220 K H 320	12 x M8	33
200	53	220	2,5	55	45	22222 K H 322	16 x M8	35
215	58	240	2,5	58	45	22224 K H 3124	16 x M8	40
230	64	260	3	61	45	22226 K H 3126	12 x M12	46
250	68	275	3	65	45	22228 K H 3128	16 x M12	60
210	53	235	3	55	70	23028 K H 3028	16 x M12	58
225	56	250	2	60	70	23030 K H 3030	16 x M12	70
270	86	300	3	78	90	23132 K H 3132 HG	16 x M12	150
260	67	285	2	68	70	23034 K H 3034 HG	16 x M12	105
280	88	330	3	80	90	23134 K H 3134 HG	16 x M12	180
320	86	360	3	80	100	22236 K H 3136 HG	16 x M16	230
280	74	310	3	72	70	23036 K H 3036 HG	16 x M12	132
300	96	350	3	80	100	23136 K H 3136 HG	16 x M16	215
320	112	360	3	90	90	23236 K H 2336 HG	16 x M16	265

SOPPORTI MONOBLOCCO PER TENSIONAMENTO


Serie STL

per cuscinetti orientabili a rulli con bussola conica

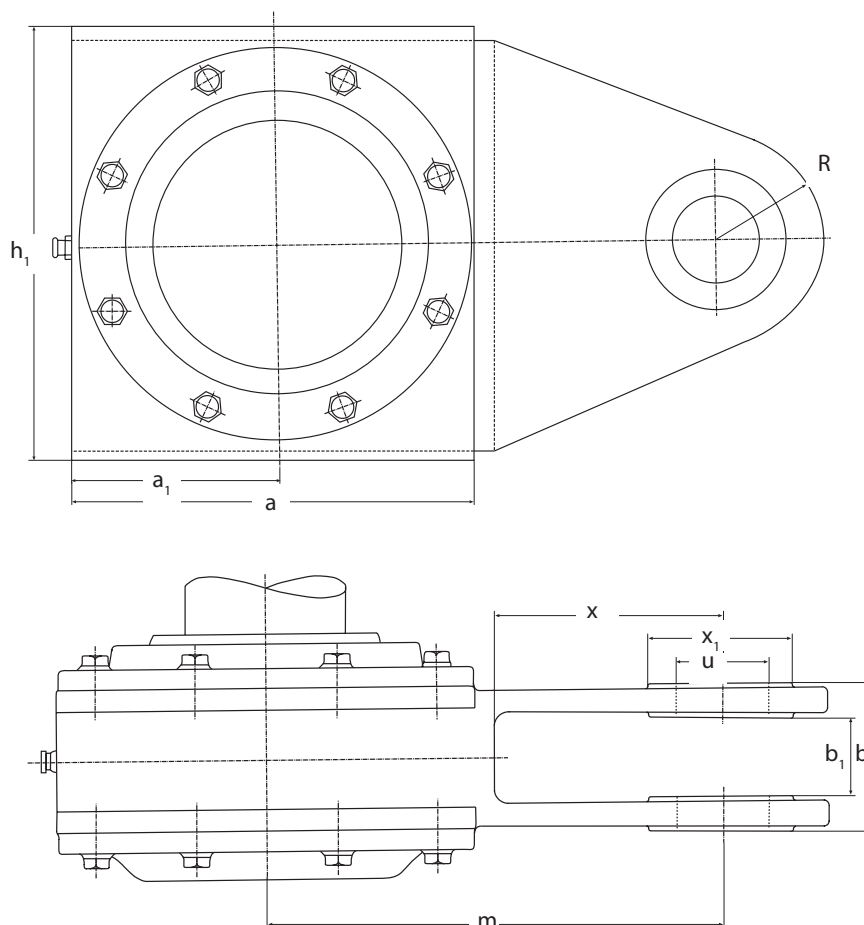


Sigla sopporto	d ₁	a	a ₁	h ₁	f	m	x	x ₁	u	b	b ₁	g ₂	g ₄	g ₃	g ₅	g	f ₁
[mm]																	
STL 3038 K	170	375	180	440	400	290	90	90	50	150	60	211	88	93	118	105	65
STL 3040 K	180	390	200	430	400	275	85	120	70	125	62	240	108	107	133	125	83
STL 3140 K	180	420	210	440	410	360	140	100	60	140	70	270	115	120	150	140	100
STL 3044 K	200	430	210	480	440	325	100	100	60	200	70	241	103	103	138	120	65
STL 3144 K	200	470	235	510	480	530	260	140	100	144	74	276	128	128	148	150	65
STL 3148 K	220	520	260	540	500	515	250	250	100	215	123	328	129	149	179	152	65
STL 3052 K	240	500	245	540	500	515	250	250	100	215	123	261	113	113	148	135	65
STL 3152 K	240	550	275	570	540	565	270	250	100	225	135	336	140,5	150,5	185,5	175	80
STL 3252 K	240	596	298	610	570	615	300	240	100	240	173	-	157,5	167,5	-	205	103
STL 3156 K	260	600	300	610	570	615	300	200	100	240	173	351	148	158	193	175	103
STL 3160 K	280	630	315	650	610	650	310	200	100	270	170	385	155	170	215	190	130
STL 2260 K	280	660	330	680	640	630	280	200	105	220	150	370	160,5	174,5	-	177	80
STL 3260 K	280	680	340	690	650	680	310	260	100	270	190	404	187	182	-	230	115
STL 3164 K	300	680	340	700	660	680	340	240	110	300	180	395	192	180	215	210	140
STL 3168 K	320	740	370	740	700	720	310	240	120	300	180	445	200	200	245	220	150
STL 3268 K	320	735	385	740	700	750	310	240	110	300	213	-	238	203	-	265	123
STL 3272 K	340	800	400	830	790	765	310	280	130	330	213	509	222	227	282	275	123
STL 3176 K	360	750	375	790	740	750	320	230	110	300	200	459	202	202	257	230	120
STL 3276 K	360	810	405	820	780	780	305	240	110	300	213	-	257	232	-	295	123

Esecuzione AF

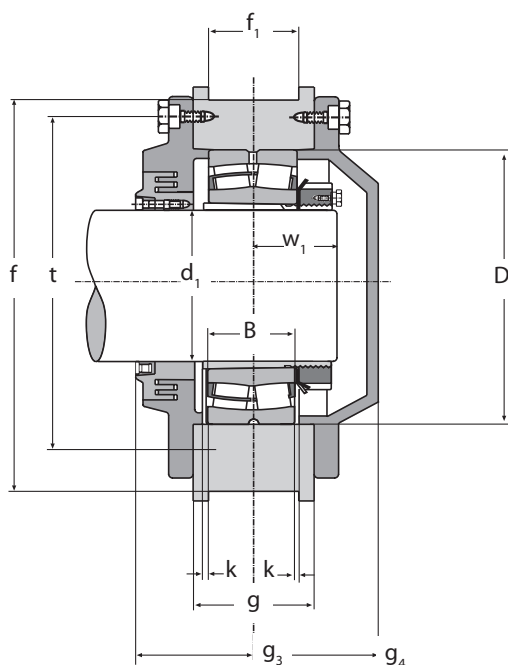

Esecuzione BF

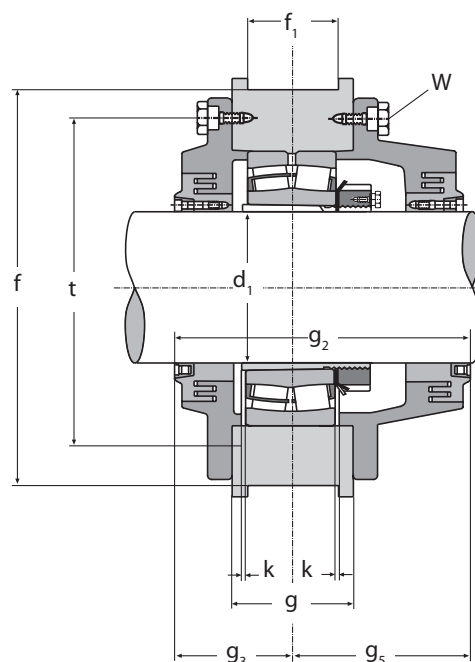

Esecuzione AL

Esecuzione BL

D [mm]	B	t	k	W ₁	R	Cuscinetti con bussola adatti	Viti di fissaggio del coperchio	Massa [kg]
290	75	325	3	72	70	23038 K H 3038 HG	16 x M16	156
310	82	340	3	78	80	23040 K H 3040 HG	16 x M16	347
340	112	380	2	95	80	23140 K H 3140 HG	16 x M16	223
340	90	375	3	80	80	23044 K H 3044 HG	16 x M16	223
370	120	410	4	95	120	23144 K H 3144 HG	16 x M16	327
400	128	455	4	110	150	23148 K H 3148 HG	16 x M20	387
400	104	440	4	94	150	23052 K H 3052 HG	16 x M16	298
440	144	490	4	115	150	23152 K H 3152 HG	16 x M24	436
480	174	535	3	130	150	23252 K H 2352 HG	16 x M20	577
460	146	510	4	120	150	23156 K H 3156 HG	16 x M24	472
500	160	550	4	130	150	23160 K H 3160 HG	16 x M24	584
540	140	600	4	120	170	22260 K H 3160 HG	16 x M20	694
540	192	600	4	145	180	23260 K H 3260 HG	16 x M24	838
540	176	590	4	135	180	23164 K H 3164 HG	16 x M24	767
580	190	630	4	160	200	23168 K H 3168 HG	16 x M24	876
620	224	680	5	210	200	23268 K H 3268 HG	16 x M24	977
650	232	890	5	190	225	23272 K H 3272 HG	16 x M24	1258
620	194	700	5	170	200	23176 K H 3176 HG	16 x M24	986
680	240	730	5	220	200	23276 K H 3276 HG	16 x M30	1330